# IDESCE!



550 Series 75 Watts Maximum 600 Series 60 Watts Maximum 650 Series Two 60 Watts Maximum

700 Series 75 Watts Maximum

Handcrafted, Rust Resistant Acrylic Wall Luminaires

Sleek, contemporary design makes these luminaires the natural choices for many architectural applications. Using the finest thermoplastic polymers available, the luminaires are handcrafted with careful precision. Natural UV stabilized acrylic offers the longest life in outdoor exposure. A lens thickness of 3/16" enhances impact strength and structural beauty. The construction affords easy installation and maintenancefree service. A variety of configurations, mountings, and lens colors are available.


#### **Specifications**

Lens:	Standard in <sup>3</sup> /16" UV-stabilized acrylic. Colors include clear, frosted clear, opal white, and bronze. Handcrafted construction.			
Mounting Base:	Injection molded UV-stabilized, noncorrosive and nonconductive black <b>polycarbonate</b> . Luminaires are open bottom.			
Socket:	Medium base ceramic with copper screw shell, rated 250V, 660W with leads insulated for 105°C.			
Lamp:	Not included. LED Lamps can be purchased with Luminaires.  LED Information: Type A-19 Lamp available for purchase from W. F. Harris Lighting, Inc. in 5000K and Dimmable 2700K color temperatures. Lamp manufacturer rated for 10,950 through 25,000 hours of 24/7 LED life, lamp and application dependent. Incandescent Information: Uses A-19 incandescent lamp (provided by others and not available for purchase through W. F. Harris Lighting, Inc.)			
Hardware:	Mounting hardware included.			

#### **ETL Listed For Wet Locations.**

All acrylic lens components meet Underwriters Laboratories material requirements and carry a flammability rating of 94HB or better on lenses and the superior 94-5V rating on housings.

Luminaire Type_	
Catalog Number_	
Job Name	
Approval	





700-W-FC

600-W-BZ





550-WE-BZ

650-OW



**SBA QUALIFIED SMALL BUSINESS MANUFACTURER** 

**TAA COMPLIANT** 

### **W**⊨Harris Lighting, Inc.™

#### **Innovative Lighting Designs Since 1970**

P.O. Box 5023, Monroe, NC 28111-5023, USA 704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE) e-mail: customerservice@wfharris.com www.wfharrislighting.com

Form 1549 5/19


## INCANDESCENT


Ordering Information (Fill In Blanks For Complete Catalog Number)

Model	Mounting Base Lens Colo	r Lamp	Options	
Model	Mounting Base	Lens Color	Lamp	Options
550	W-1" Wall Reveal	<b>CL-</b> Clear	INC <sup>1</sup>	CLT-Clear Top Lens (Standard with Model 650)
600		<b>BZ-</b> Bronze	5A19 LED*,2	GRAPHICS-Numbers and Letters (Please Specify)
650		FC-Frosted Clear	8A19 LED*,3	
700			10A19 LED*,4	
			14A19 LED*,5	


<sup>&</sup>lt;sup>1</sup>Provided By Others


#### **Dimensions**



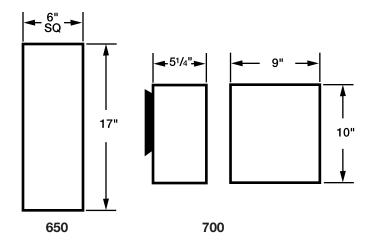

#### **Mounting**





Specifications Subject to Change Without Notice

Luminaire is Warranted to be Free of Defects in Materials and Workmanship for One Year From Invoice Date.



#### **Innovative Lighting Designs Since 1970**

P.O. Box 5023, Monroe, NC 28111-5023, USA 704.283.7477 (HEADQUARTERS) • 800.842.9345 (TOLL FREE) e-mail: customerservice@wfharris.com www.wfharrislighting.com



MADE IN AMERICA
TRADE AGREEMENT ACT COMPLIANT

SBA QUALIFIED

Printed in USA Form 1549 5/19

<sup>\*</sup>Available for purchase through W. F. Harris Lighting.

<sup>&</sup>lt;sup>2</sup>5000K Daylight (Replaces 40W INC)

<sup>&</sup>lt;sup>3</sup>5000K Daylight (Replaces 60W INC)

<sup>&</sup>lt;sup>4</sup>2700K Dimmable, Warm White (Replaces 60W INC)

<sup>&</sup>lt;sup>5</sup>5000K Daylight (Replaces 100W INC)